




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup>:</b> <b>H01L 21/268, C30B 13/24</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/14784</b> <b>(43) International Publication Date:</b> 16 March 2000 (16.03.00)
<b>(21) International Application Number:</b> PCT/EP99/06161 <b>(22) International Filing Date:</b> 23 August 1999 (23.08.99)  <b>(30) Priority Data:</b> 9819338.6                      4 September 1998 (04.09.98)                      GB  <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  <b>(72) Inventor:</b> MCCULLOCH, David, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).  <b>(74) Agent:</b> STEVENS, Brian, T.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		<b>(81) Designated States:</b> JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** DOUBLE-PULSE LASER CRYSTALLISATION OF THIN SEMICONDUCTOR FILMS**(57) Abstract**

A laser crystallisation method comprises the steps of providing a film (51) of semiconductor material on an insulating substrate, and scanning a pulsed laser beam over the film, the laser beam being shaped to define a chevron (2). Each pulse of the laser beam comprises at least a first pulse portion (30) of a first energy and a second subsequent pulse portion (34) of a second energy preferably lower than the first one. The first and second pulse portions of each pulse are applied at substantially the same position over the film (51). This method is used to form electronic devices and enables reliable crystallisation to form large single crystal areas in thin semiconductor films (51) especially of amorphous Si for TFT devices.

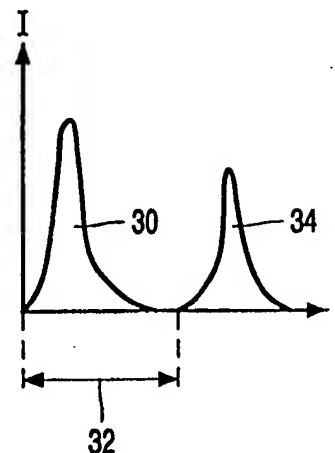**Best Available Copy**

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

## DOUBLE-PULSE LASER CRYSTALLISATION OF THIN SEMICONDUCTOR FILMS

5           This invention relates to laser crystallisation of thin films. Crystallisation of silicon films has been used extensively in order to produce high performance active matrix liquid crystal displays and other devices. A particular advantage of the use of laser crystallisation is that polysilicon thin film transistors can be fabricated on glass substrates, without introducing thermal damage to the glass  
10   substrate.

          Various measures have been proposed in order to increase the grain size of laser crystallised silicon films, so as to reduce the number of grain boundaries occurring in devices formed from the silicon film. The article "Single-  
15   Crystal Si Films Via A Low-Substrate-Temperature Excimer-Laser Crystallization Method" in Mat. Res. Soc. Symp. Proc. Vol. 452 pp.953-958 by R. S. Sposili, et. al. describes the use of a chevron-shaped laser beam profile for the crystallisation of silicon to form single-crystal regions at predetermined locations on thin silicon films. The contents of this article are incorporated herein as  
20   reference material. The described method is applied to a film of silicon having a thickness of 200nm, and the method may practically be applied for film thicknesses down to approximately 100nm. For thicknesses below this level self-nucleation within the film results in reduction in the grain size.

          It is desirable to reduce the film thickness of the semiconductor layer for  
25   various reasons. A lower thickness results in a more rapid laser crystallisation process, because a thicker semiconductor film requires more energy to melt the film. As a result, for a given energy of laser source, a smaller area of the film can be treated using the laser source. Furthermore, a thinner semiconductor film has reduced light sensitivity, which may be desirable for certain  
30   semiconductor devices.

          According to a first aspect of the invention, there is provided a method of

manufacturing an electronic device comprising a semiconductor component having a thin film semiconductor layer provided on an insulating substrate, wherein the semiconductor layer is crystallised by scanning a pulsed laser beam over the film, the laser beam being shaped to define a chevron, each pulse of the laser beam comprising at least a first pulse portion of a first energy and a second subsequent pulse portion of a second energy, at least the first and second pulse portions of each pulse being applied at substantially the same position over the film. Each pulse of the chevron-shaped beam may comprise more than two pulse portions. Thus, each pulse may comprise successive pulse portions of different energies which are applied at substantially the same position over the film.

The use of a chevron-shaped crystallisation beam enables the grain size of single crystal regions in the semiconductor film to be increased. Furthermore, the use of the multiple-pulse laser reduces the tendency to self-nucleation within the semiconductor film. This enables the crystallisation method to be employed for film thicknesses below 100nm, and preferably for film thicknesses of approximately 40nm.

The invention also provides a laser crystallisation method for crystallising a thin film semiconductor layer, comprising the steps of:

providing a film of semiconductor material on an insulating substrate;  
scanning a pulsed laser beam over the film, the laser beam being shaped to define a chevron, each pulse of the laser beam comprising at least a first pulse portion of a first energy and a second subsequent pulse portion of a second energy, at least the first and second pulse portions of each pulse being applied at substantially the same position over the film.

A double-pulse laser crystallisation method is known from the article "A Novel Double-Pulse Excimer-Laser Crystallization Method of Silicon Thin-Films" in Jpn. J. Appl. Phys. Vol 34 (1995) pp 3976-3981 by R. Ishihara et. al., and the method is described as increasing the grain size of excimer-laser crystallised silicon films, particularly so that a single split pulse can produce crystallisation of a 1 micrometer region of film material. The contents of this article are also incorporated herein as reference material.

The invention also provides a laser crystallisation apparatus comprising:

a pulsed laser source providing laser beam pulses;

an optical processing system for splitting the laser beam pulses to provide output pulses having an intensity profile defining at least a first pulse portion of a first energy and a second subsequent pulse portion of a second energy;

means for shaping the output pulses to form chevron-shaped pulses; and

a projection system for projecting the chevron-shaped pulses onto a sample for crystallisation.

10

Embodiments of the invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows the grain boundaries defined by a pulse laser applied to an amorphous semiconductor film, with the pulse applied through a chevron shaped mask;

15

Figure 2 shows laser crystallisation apparatus according to the invention; and

Figure 3 shows the laser beam intensity pattern at locations IIIA and IIIB within the apparatus of Figure 2.

20

As shown in Figure 1, the solidification front for a laser crystallisation technique according to the invention is defined as a chevron-shaped beam 2 which grows a single crystal grain at the apex of the chevron. The single crystal grain grows as the beam is advanced over the film. This beam shape enables large single-crystal regions to be defined within a semiconductor layer and which can be positioned to coincide with the desired locations for semiconductor devices to be formed from the film, for example thin film transistors. Each pulse of the beam comprises two pulse portions, for example having the intensity-time profile represented in Figure 3 part B. This double-pulse method enables the thickness of films which can be processed using the invention to be reduced to the optimum levels for amorphous silicon semiconductor layers, for example 40nm.

30

The method of the invention is applicable to laser crystallisation methods, which enable the conversion of amorphous or polycrystalline silicon films into directionally solidified microstructures. The crystallisation method involves complete melting of the selected regions of the semiconductor film using  
5 irradiation through a patterned mask, combined with controlled movement of the film relatively to the mask between pulses. For a given energy output of the laser source of the crystallisation apparatus, a thinner film thickness enables the rate at which the patterned laser is scanned over the film to be increased.

Figure 1 illustrates the crystallisation caused by advancing a laser  
10 heating beam patterned using a chevron-shaped aperture over the film of semiconductor material. The use of a chevron shaped mask 2 causes a single crystal grain to be formed at the apex of the chevron, which then experiences lateral growth not only in the translation direction (arrow 6 in Figure 1) but also transversely, due to the fact that the grain boundaries form approximately  
15 perpendicularly to the melt interface. Advancing the chevron shaped beam over the thin film semiconductor layer results in the single-crystal region 4 as shown in Figure 1 part B in the manner described in the article "Single-Crystal Si Films Via Low-Substrate-Temperature Excimer-Laser Crystallisation Method" referred to earlier in this application.

20 The chevron-shaped beam may have a width (W) of the order of ones or tens of microns, so that the resulting single crystal region is sufficient in size to correspond to the channel region of a thin film transistor to be fabricated using the thin film semiconductor layer. The width of the slit defining the beam shape may be approximately 1 $\mu$ m.

25 The laser may be patterned to define an array of the chevron-shaped beams so that the crystallised film includes an array of single crystal regions. The chevron-shaped beam defines first and second solidification fronts 8, 10 which meet at an apex 12. These fronts are not necessarily perpendicular, and an acute angle or an obtuse angle may be subtended at the apex. These  
30 possibilities are each intended to fall within the term "chevron" as used in this description and the claims.

Lateral solidification of the semiconductor material melted by the laser

heating is optimised when the laser heating results in complete melting of the full depth of the thin film. A sufficiently high laser energy density is required to achieve this which will depend on the film characteristics. A pulsed excimer laser is appropriate for this purpose.

5           The laser crystallisation method of the invention also employs a laser pulse intensity profile having two or more sequential intensity peaks. The use of double-pulse excimer laser crystallisation has already been proposed to increase the grain size of single crystal regions. The double-pulse method has been understood to slow the cooling rate, so that the crystalline nuclei can grow  
10 to a sufficient size to meet each other before the onset of copious homogeneous nucleation which is known to occur at about 500°C of undercooling. The first pulse causes the film to melt, and a sufficient time period is provided before the second pulse to allow thermal diffusion into the substrate. This pre-heating of the substrate reduces the cooling rate after the second pulse.

15           An example of the possible intensity profile is shown in Figure 3 part B. The first pulse 30 has a sufficient energy to density to melt completely the film, and this energy density will depend on the nature and thickness of the film being treated by the process. The energy density may be of the order of 300mJ/cm<sup>2</sup>, for an amorphous silicon thin film having a thickness of 50nm. The pulse  
20 duration may be of the order of 30ns. The delay 32 between the pulses is sufficient to allow a significant diffusion of heat into the substrate, yet not sufficient to allow copious homogenous nucleation of the unsolidified portion of the film, and for example may be between 100 and 200ns. Less energy will be required from the second pulse 34 may have an energy density of 150mJ/cm<sup>2</sup> in  
25 the example shown. The purpose of the second pulse is cause the solidification process to start again.

          The exact profile of the laser pulse intensity profile will be selected taking numerous considerations into account, such as the chemical composition and the mechanical structure of the film. The invention has been described in the  
30 context of producing polycrystalline silicon films from amorphous silicon deposited layers, although the invention is equally applicable to laser crystallisation of other materials.

Figure 2 shows a laser crystallisation apparatus according to the invention. A pulse laser source 40 provides laser beam pulses, for example having the profile shown in Figure 3 Part A. An optical processing system 42 provides the multiple peak intensity profile of which an example is shown in  
5 Figure 3 Part B (in which each pulse includes a first pulse portion of a first energy and a second subsequent pulse portion of a second energy). This system 42 receives the laser source output from a beam splitter 44, which is partially transmissive and partially reflective. An optical delay is provided by the processing system 42, as well as attenuation of the light signal if desired. Using  
10 a combiner 46, the delayed signal is combined with the part of the original source output transmitted by the beam splitter 44.

The double pulse laser beam output is supplied to a homogeniser 48 for conversion from a semi-gaussian profile to a top-hat profile.

As one possibility, a mask 50 is provided for shaping the output pulses to  
15 form the chevron-shaped pulses, for subsequent transmission to the sample 51, using a projection system 52.

The sample (comprising the film 51 on its insulating substrate) is mounted on a movable platform so that the projected beam can be caused to scan over the sample.



## CLAIMS

- 5           1.     A method of manufacturing an electronic device comprising a semiconductor component having a thin film semiconductor layer provided on an insulating substrate, wherein the semiconductor layer is crystallised by scanning a pulsed laser beam over the film, the laser beam being shaped to define a chevron, each pulse of the laser heat source comprising at least a first  
10 pulse portion of a first energy and a second subsequent pulse portion of a second energy, at least the first and second pulse portions of each pulse being applied at the substantially same position over the film.
2.     A method as claimed in claim 1, wherein the semiconductor  
15 component comprises a thin film transistor.
3.     A laser crystallisation method for crystallising a thin film semiconductor layer, comprising the steps of:  
                providing a film of semiconductor material on an insulating substrate; and  
20               scanning a pulsed laser beam over the film, the laser beam being shaped to define a chevron, each pulse of the laser beam comprising at least a first pulse portion of a first energy and a second subsequent pulse portion of a second energy, at least the first and second pulse portions of each pulse being applied at substantially the same position over the film.  
25
4.     A method as claimed in claim 1,2 or 3, wherein thickness of the film is less than 100nm.
5.     A method as claimed in claim 4, wherein thickness of the film is  
30 approximately 40nm.
6.     A method as claimed in any preceding claim, wherein the first

energy is greater than the second energy.

7. A method as claimed in any preceding claim, wherein the film of semiconductor material comprises amorphous silicon.

5

8. A laser crystallisation apparatus comprising:

a pulsed laser source providing laser beam pulses;

an optical processing system for splitting the laser beam pulses to provide output pulses having an intensity profile defining at least a first pulse portion of a first energy and a second subsequent pulse portion of a second energy;

10

means for shaping the output pulses to form chevron-shaped pulses; and

a projection system for projecting the chevron-shaped pulses onto a sample for crystallisation.

15

9. A laser crystallisation device as claimed in claim 7, further comprising means for scanning the output pulses across the sample.

1/2

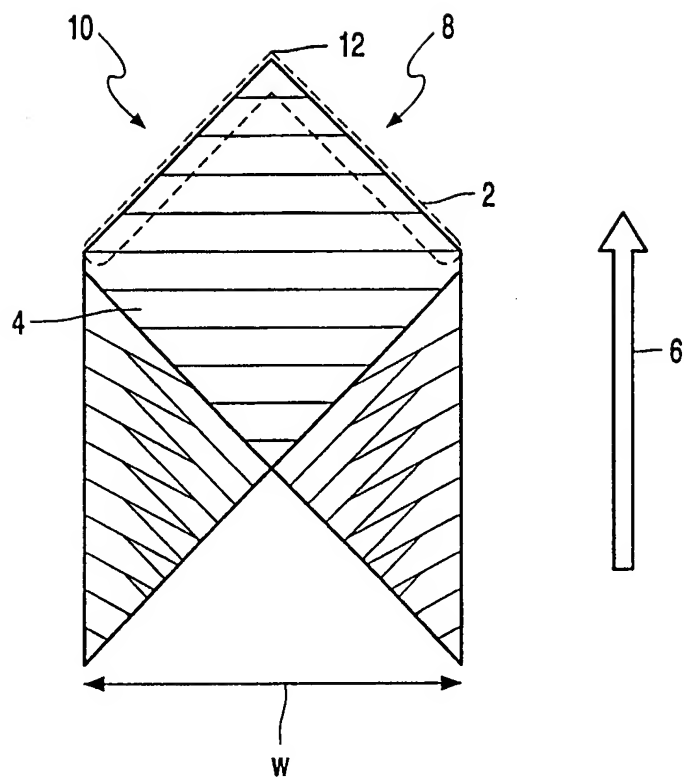


FIG. 1

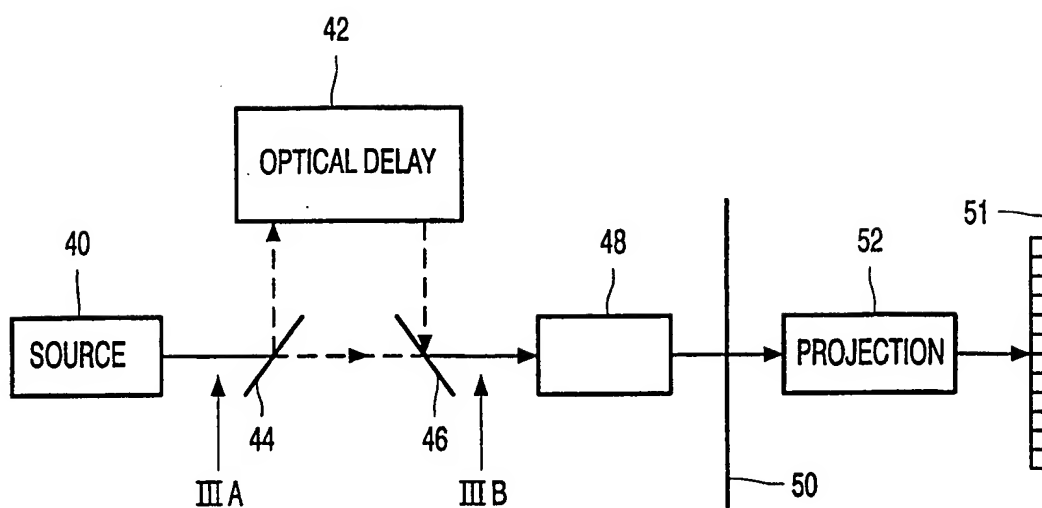


FIG. 2

2/2




FIG. 3A

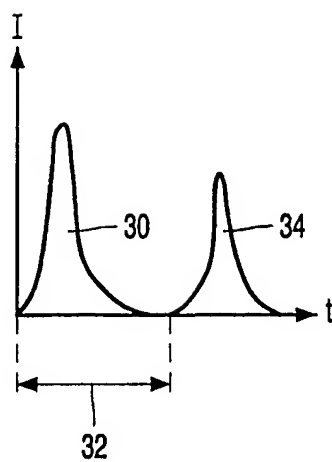


FIG. 3B

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/06161

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01L21/268 C30B13/24

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L C30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 97 45827 A (IM JAMES S ET AL (US); COLUMBIA UNIVERSITY) 4 December 1997 (1997-12-04)	1-5,7
A	page 4, line 23 -page 5, line 18 page 11, line 23 -page 13, line 23; figures 7,8,10 --- -/--	8,9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 November 1999

Date of mailing of the international search report

10/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Köpf, C

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ISHIHARA R ET AL: "A novel double-pulse excimer-laser crystallization method of silicon thin-films" JAPANESE JOURNAL OF APPLIED PHYSICS, PART 1 (REGULAR PAPERS & SHORT NOTES), vol. 34, no. 8A, August 1995 (1995-08), pages 3976-3981, XP000861506 ISSN: 0021-4922 cited in the application	1-5,7
A	the whole document	8,9
A	--- SPOSILI R S ET AL: "Single-crystal Si films via a low-substrate-temperature excimer-laser crystallization method" ADVANCES IN MICROCRYSTALLINE AND NANOCRYSTALLINE SEMICONDUCTORS 1996 SYMPOSIUM, BOSTON, MA, USA, 2 - 6 December 1996, pages 953-958, XP000856644 1997, Pittsburgh, PA, USA, Mater. Res. Soc cited in the application the whole document	1-3,7-9
A	--- US 4 589 951 A (KAWAMURA SEIICHIRO) 20 May 1986 (1986-05-20) column 1 -column 3; figure 5 -----	1,3,8

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/06161

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9745827 A	04-12-1997	NONE	
US 4589951 A	20-05-1986	JP 58021319 A	08-02-1983
		DE 3277481 A	19-11-1987
		EP 0071471 A	09-02-1983

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**